




SIGNATURE SERIES SIII-1065W

D-Frame 2.0 Exclusively Transparent Power Supply

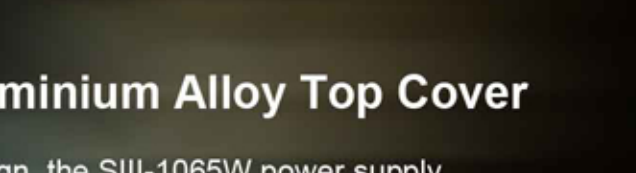

Air-Cooled Engine with Aluminium Alloy Top Cover

Continuing with the D-Frame 2.0 design, the SIII-1065W power supply is designed in the shape of an air-cooled engine with an aluminium alloy top cover. Its reflective tempered glass window emits light from within to create a stunning visual impact.

The original power supply design, combined with high wattage, excellent heat dissipation and fast charging, provides gamers with the ultimate powerful performance.

Four Timed Extra Power Modes

The SIII-1065 power supply provides options to efficiently remove the residual hot air generated by the operating PC. To accomplish this task, the PSU emits 65w electricity to keep the cooling system operational after shutting down the PC. Users can choose the timer options to be continuous, after 180 seconds, after 30 seconds or immediately shut down.



USB Intelligent Fast Charge

The designed USB internal is ideal for your mobile phone and tablet charging, moreover with the automatic identify charging system, you can charge your gadgets without turning your system on. It outputs to maximum 3A and supports APPLE 2.4 A, Samsung 2.0A fast charge. Match the BC 1.2 & YD/T 1591 USB charging regulation.



Fully Modular Cables for Quick and Easy Installation

Fully modular flat cable design simplifies installation and allows you to use only the cables you need, for a neater, cleaner build.




Highly Reliable Japanese Aluminium Electrolytic Capacitor

Premium Japanese electrolytic capacitors with 105 °C rating improves power stability at higher temperatures and provides an ultra-long lifespan.



Industry's First 165mm Silent Fan

SIII-1065W comes with 165mm quiet cooling fan. The ceramic shaft design is abrasion resistant, silent and long life, providing users with low noise and high dissipation solution.

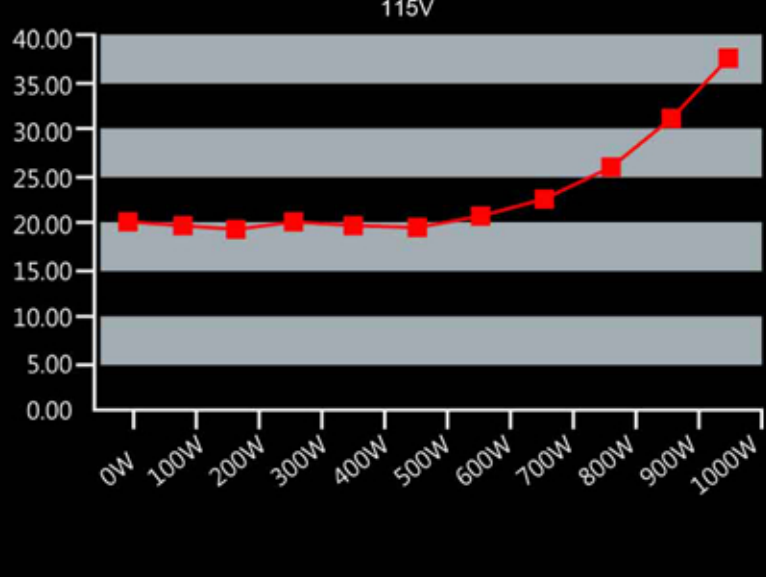

CABLE INFORMATION

	24 Pin Motherboard	650 mm	1
	8 (4+4) Pin CPU	850 mm	2
	8 (6+2) Pin PCI-E	600 mm	8
	90 Degrees SATA	700 mm	1
	SATA	600 mm	2
	4 Pin Peripheral	600 mm	3

SPECIFICATIONS

Total Power		1065W		
Type		ATX12V V2.4/ EPS12V 2.92		
Cable Management		Fully Modular		
PFC		Active PFC (>0.9)		
MTBF (Hours)		>100,000		
AC Input		100 - 240Vac. 6.5-13A 50-60Hz		
Hold-up time (ms)		>16ms		
Fan		165mm Silent Fan		
Fan Size		165mm*25mm		
Typical Fan Noise(dB)		< 25dB		
Full Protection		OCP/OVP/UVSP/SCP/OTP/OPP		
Safety Certifications		cTUVus / TUV / CB / BSMI / CE / FCC / EAC / CCC / RCM/KC		
Dimensions (L x W x D)		210 x 180 x 86mm		
Weight		2.8kg		
Warranty		5 Years		
Connector	24 Pin Motherboard	1		
	8 (4+4) Pin CPU	2		
	8 (6+2) Pin PCI-E	8		
	4 Pin Peripheral	9		
	SATA	10		
	Floppy Power	3		
		Max. Output Current	USB	EXTRA POWER

Model	Max. Output Current										USB	EXTRA POWER
	+12V1	+12V2	+12V3	+5V	+3.3V	-12V	+5VSB	MAX1	MAX2	MAX3	+5V	+12V
Signature Series	25A	25A	75A	24A	24A	0.3A	6A	125W	1000W	1650W	3A	5.4A

*MAX1: +3.3V & +5V Total Output / MAX2: +12V Total Output / MAX3: Total Output Power

