


IW-RJ460-05

High Density 4U JBOD



Features & Benefits

- Top-load design supports 60x hot-swap 3.5" SAS hard drive bays in 3 drawer cages.
- Tool-less HDD tray with captive slots and individually extracted drawers for quick maintenance.
- Features Internal cable management arm behind each HDD drawer for easy access to entire storage bay.
- UI for remote system management (via GbE port).
- Dual 1200W Platinum-level CRPS power supply modules for 1+1 redundancy.
- Opposite-facing HDD bays to offset torques and minimizes rotation vibration aggregation.
- Ultra-high static pressure, hot-swappable, exhaust blower modules for optimal airflow and cooling-efficiency.
- Compatible with 900mm deep cabinets.

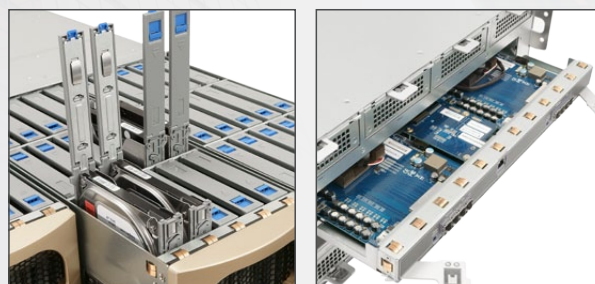

Specifications

Standard	EIA-RS310D
Dimensions (D x W x H) w/o Front Door	812.8 x 482.6 x 176 mm (32" x 19" x 7")
Storage	External: Hot-swap 3.5" x 60 (SAS 12Gbps, 20 bays in per drawer)
Power Supply	Supports <ul style="list-style-type: none"> ▪ Form Factor: Platinum CRPS redundant with PDB cable management ▪ Watt: 1200W
Cooling Fan	9733 mm blower x 6
12G Expander Module	1 or 2
Host/Expansion Port	8 x Mini SAS HD (SFF-8644) for each 12G expander module
Management	Smart fan, thermal monitor, HDD monitor, voltage monitor, alarm warning
SES	Supports SES-2 (SCSI Enclosure Service)
Maintenance	Supports management by Ethernet (Optional) and RS-232
HDD Power Management	HDD sequential power on
Temperature	0°C to 35°C
Material	Material: SGCC Thickness: 1.0 mm
Rail Kit	Fixed rail blade

* The actual product is subject to change without prior notice. In Win Development Inc. reserves the right to make any final modifications.

* The above image is for reference only. All hardware components are not included.



CONTEMPORARY & INNOVATIVE
www.in-win.com