



SIGNATURE SERIES SI-1065W



Transparent Power Supply with Brilliant Red Aluminum Alloy Top Cover

The SI-1065W power supply is designed exclusively for the X-Frame 2.0. The aluminum alloy top cover is an elaborate crimson color, which perfectly matches the design of X-Frame 2.0.

The PSU comes with 4mm tempered glass transparent window that's backlit to create a stunning visual of the internal components.

The SI-1065W is a powerful PSU with striking features.



Four Timed Extra Power Modes

The SI-1065W power supply provides options to efficiently remove the residual hot air generated by the PC. The PSU emits 65W of electricity to keep the cooling system operational after shutting down the PC.

Users can choose the timer options to be continuous, shut down after 180 seconds, after 30 seconds or immediately shut down.



USB Intelligent Fast Charge

The designed USB internals are ideal for charging phones and tablets.

The SI-1065W PSU hosts an automatic identifying charging system, so you can charge electronics without turning the system on.

It outputs to maximum 3A and supports APPLE 2.4 A, Samsung 2.0A fast charge. Matches the BC 1.2 & YD/T 1591 USB charging regulation.

Fully Modular Cables for Quick and Easy Installation


Fully modular flat cable design simplifies installation and allows you to use only the necessary cables for a neater, cleaner build.



Highly Reliable Japanese Aluminium Electrolytic Capacitor

The SI-1065W passes 105 °C ratings, improving power stability at higher temperatures and providing an ultra-long lifespan.

Fan Noise of the Power Supply

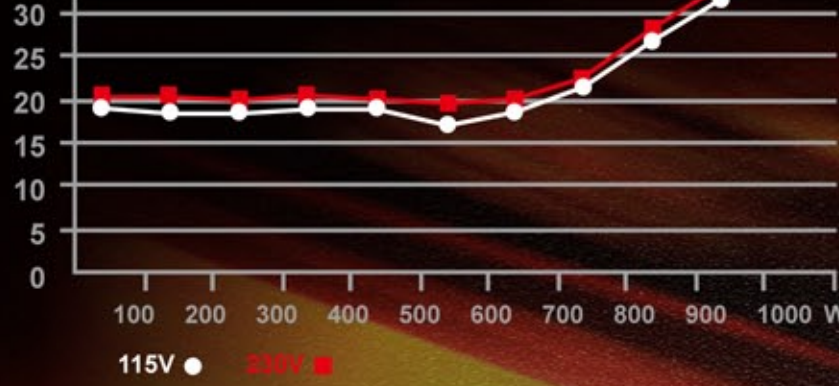

165mm Silent Fan Design

The SI-1065W comes with 165mm silent fan. This special ceramic ferrule design is abrasion resistant and silent, providing users with a quiet environment for battlestations.



CABLE INFORMATION

	24 Pin Motherboard		1
	8(4+4) Pin CPU		2
	8(6+2) Pin PCI-E		8
	SATA		1
			2
			1
	4 Pin Peripherals 4 Pin FDD		2

SIGNATURE SERIES SI-1065W

Model	Signature Series SI-1065W
Total Power	1065W
ATX/EPS Version	ATX12V V2.4/ EPS12V V2.92
AC input	100 - 240Vac, 6.5-13A 50-60Hz
Cable Management	Fully Modular
PFC	Active PFC (>0.9)
Efficiency	Up to 92%
MTBF (Hours)	> 100,000
Hold-up Times (ms)	> 16ms
Fan	165mm Silent Fan
Fan Size	165mm x 25mm
Typical Fan Noise(dB)	50%Load < 25dB
Full Protection	OCP/OVP/UVSP/SCP/OTP/OPP
Safety Certification	cTUVus / TUV / CB / BSMI / CE/ FCC / EAC / CCC / RCM / KC
Dimensions (LxWxD)	242x 190 x 94mm
Weight	3kg
Warranty	5 years

Connector	24-Pin Motherboard	1
	8-(4+4)Pin CPU	2
	8-(6+2)Pin PCI-E	8
	SATA	6
	4-Pin Peripheral	6
	Floppy	2

* In Win products comply with RoHS regulations
* Specifications may vary based on different regions



Model	Max. Output Current											
	+12V1	+12V2	+12V3	+5V	+3.3V	-12V	+5VSB	MAX1	MAX2	MAX3	+5V	+12V
Signature Series SI-1065W	25A	25A	75A	24A	24A	0.3A	6A	125W	1000W	1650W	3A	5.4A

*MAX1: +3.3V & +5V Total Output / MAX2: +12V Total Output / MAX3: Total Output Power

*MAX1: +3.3V & +5V Total Output / MAX2: +12V Total Output / MAX3: Total Output Power