

SIGNATURE SERIES SII-1065W




In Win's First Transparent Power Supply

SII-1065W is the first power supply designed exclusively for our signature computer chassis, the H-Frame 2.0. Built by premium aluminium metal and 4mm tempered glass windows. The quality is matched with the harmonious combination of aluminium and glass creating a remarkable, eye-catching display.



Four Timed Power Modes


The SII-1065W power supply provides options to efficiently remove the residual hot air generated by the operating PC. To accomplish this task, the PSU emits 65w electricity to keep the cooling system operational after shutting down the PC. Users can choose the timer options to be continuous, after 180 seconds, after 30 seconds or immediately shut down.

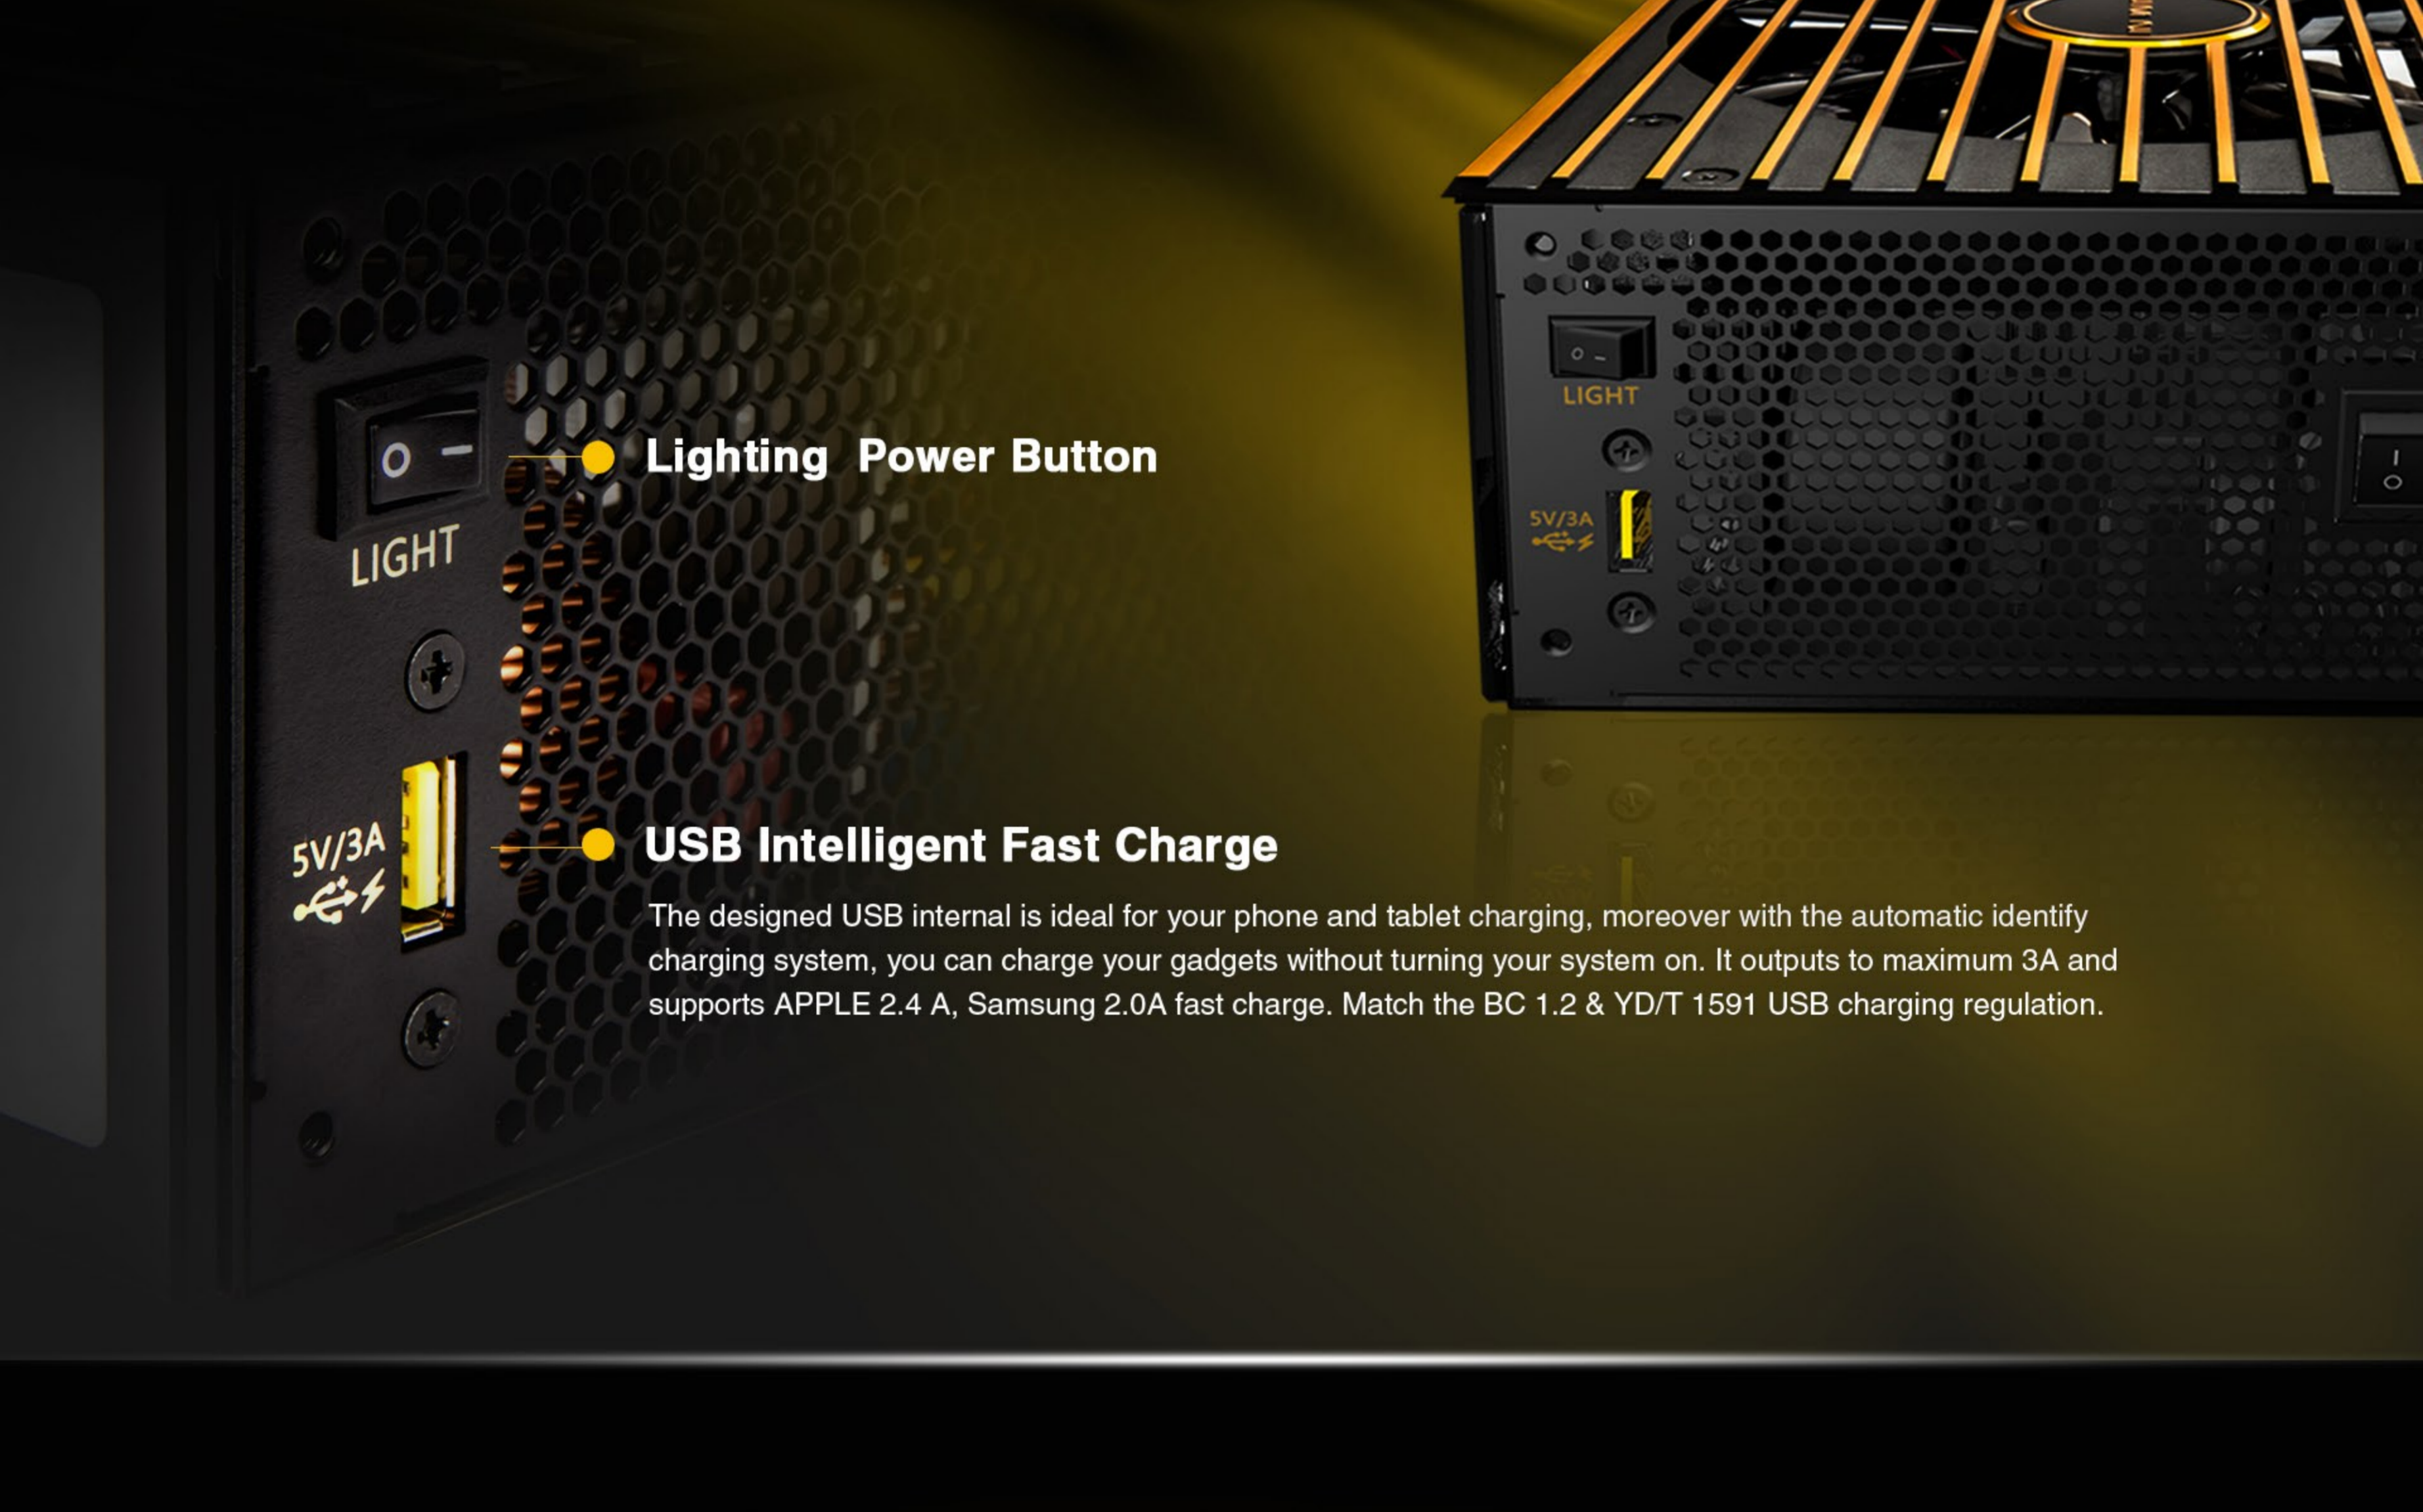

Lighting Power Button



USB Intelligent Fast Charge

The designed USB internal is ideal for your phone and tablet charging, moreover with the automatic identify charging system, you can charge your gadgets without turning your system on. It outputs to maximum 3A and supports APPLE 2.4 A, Samsung 2.0A fast charge. Match the BC 1.2 & YD/T 1591 USB charging regulation.

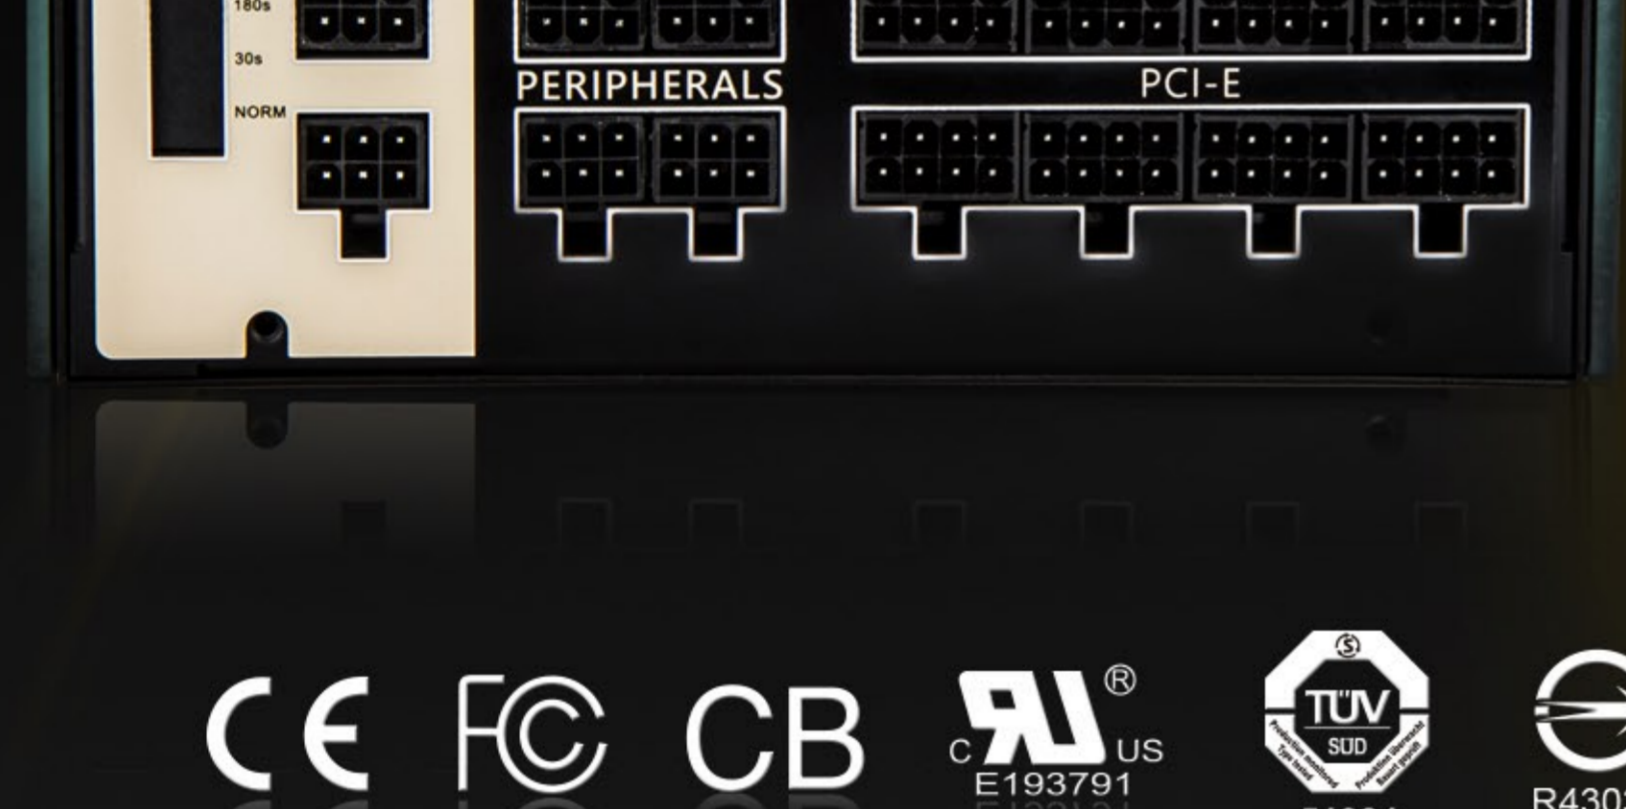

Low-Profile Cable Set for Quick and Easy Installation

Fully modular and low-profile cable design simplifies installation and allows you to use only the cables you need, for a neater, cleaner build.

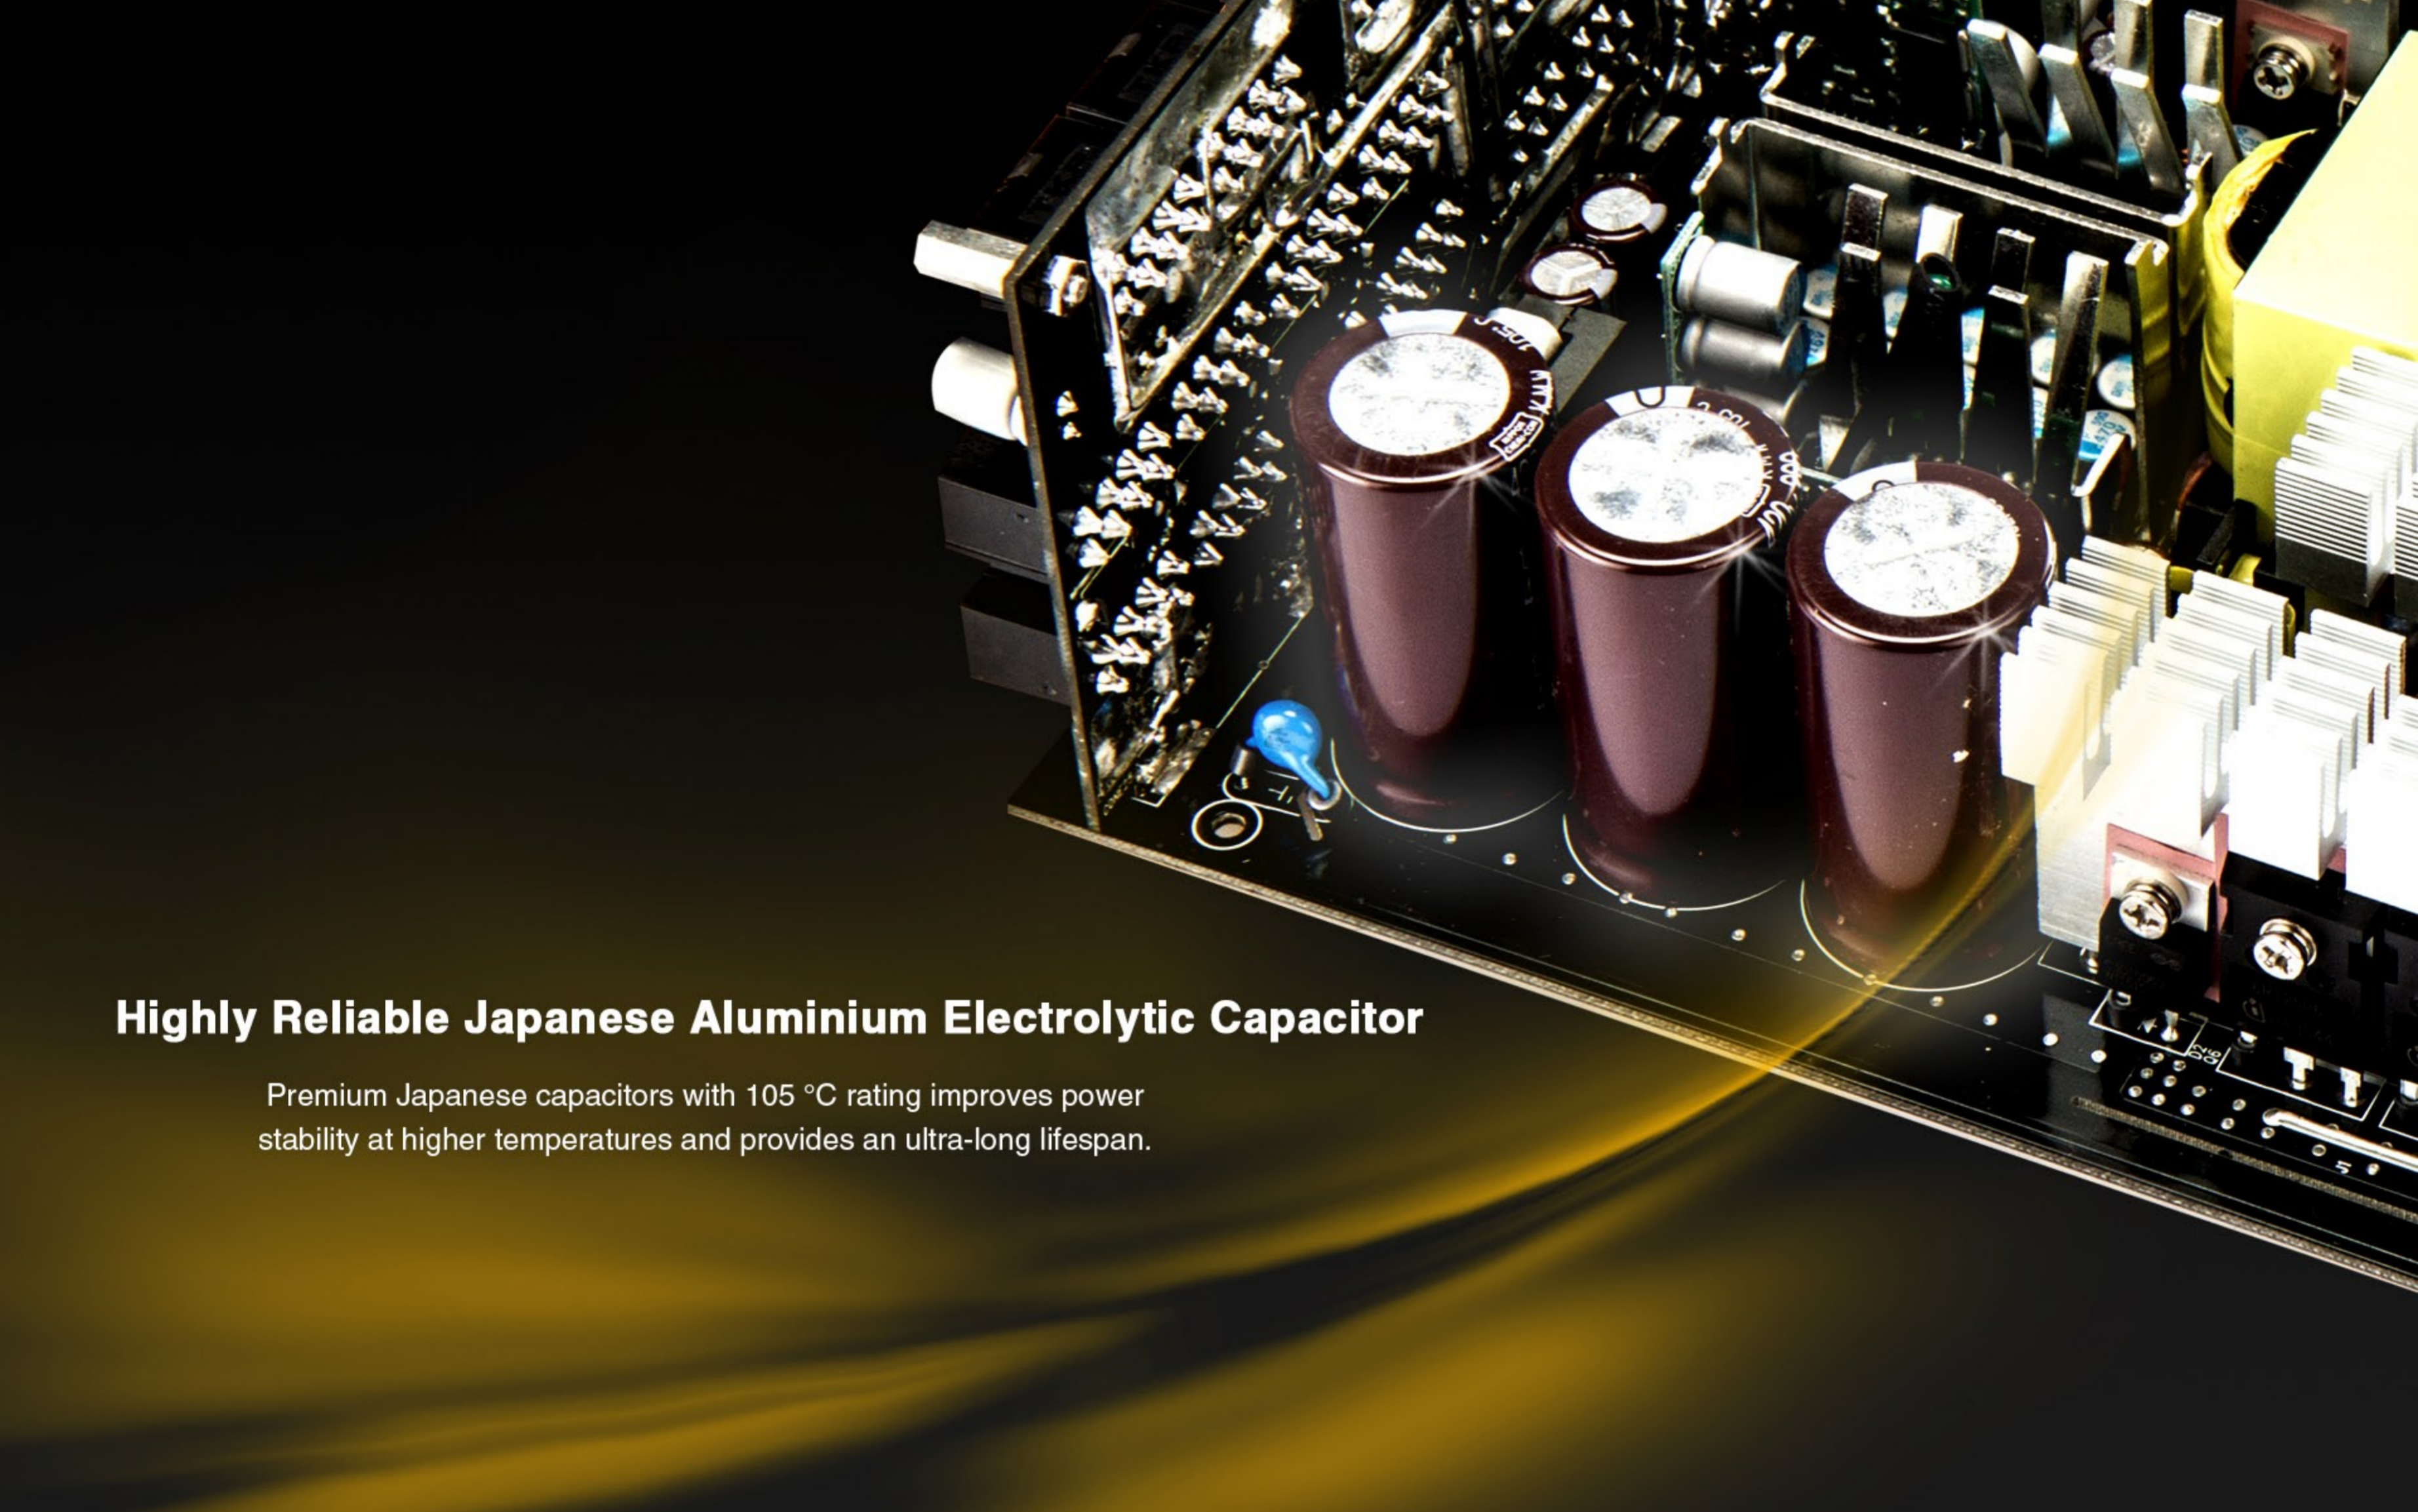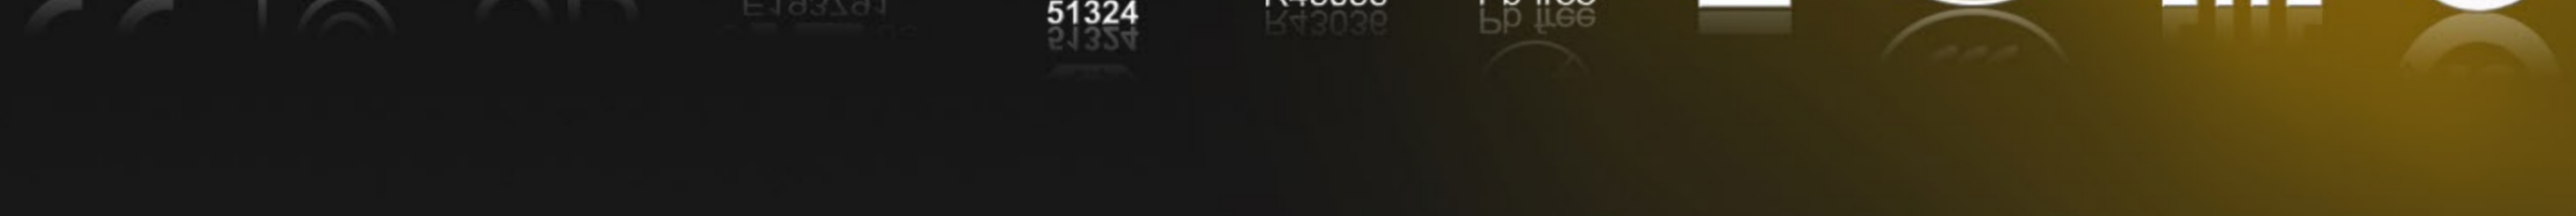


Highly Reliable Japanese Aluminium Electrolytic Capacitor

Premium Japanese capacitors with 105 °C rating improves power stability at higher temperatures and provides an ultra-long lifespan.



Fan Noise of the Power Supply

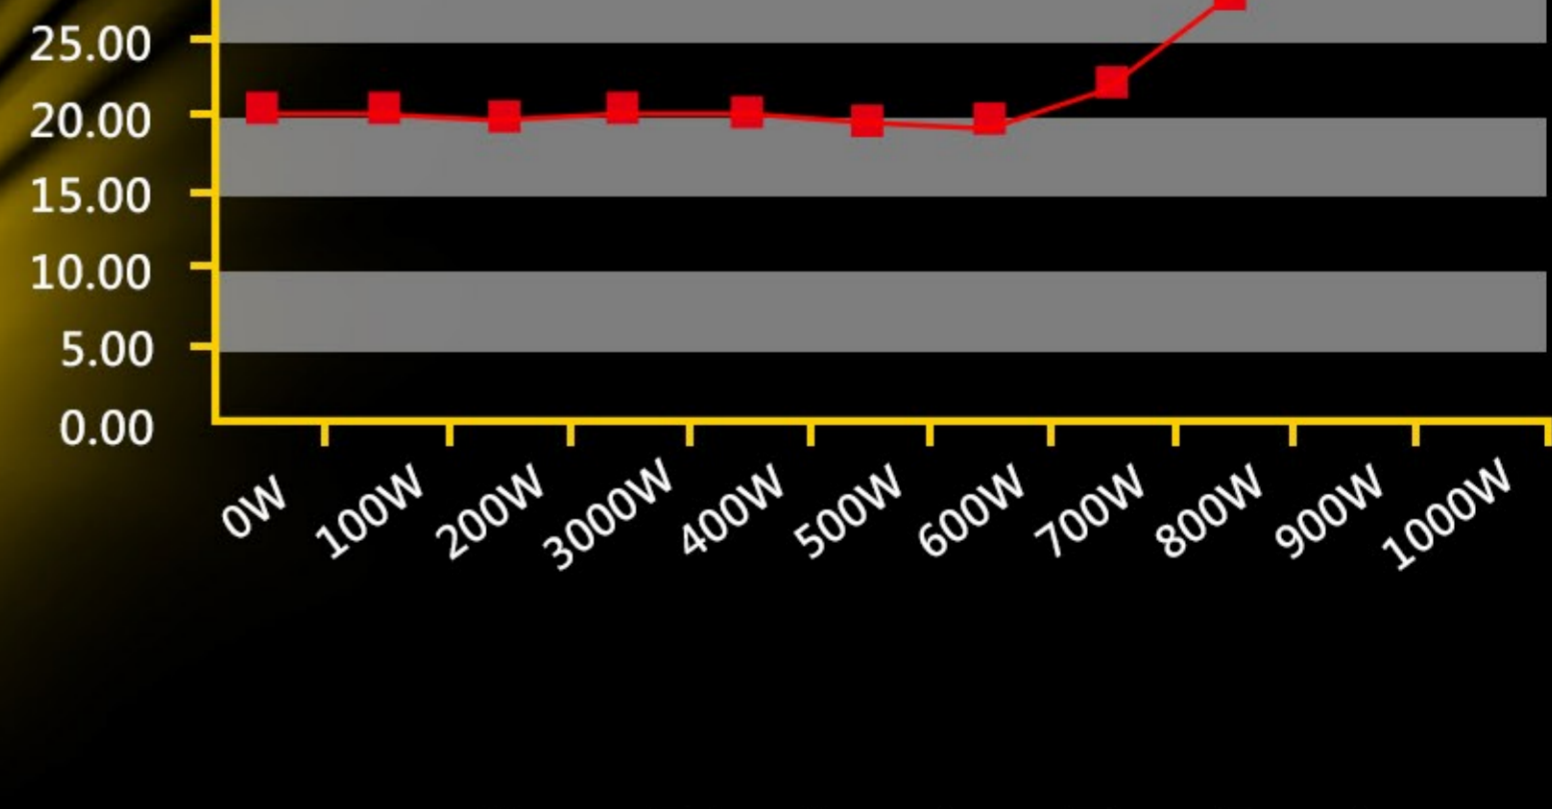

16.5 cm Silent Dissipation Fan Design

SII-1065W comes with 165mm silent dissipation fan. The special ceramic ferrule design is abrasion resistant, silent and useful, providing users with perfect silent and high dissipation solution.

CABLE INFORMATION

Connector	Quantity	Length
24 Pin Motherboard	1	650mm
8 (4+4) Pin CPU	2	650mm
8 (6+2) Pin PCI-E	8	600mm
90 Degrees SATA	1	600mm, 50mm, 50mm, 50mm
SATA	2	600mm, 100mm, 100mm
4 Pin Peripheral	3	600mm, 100mm, 100mm, 100mm

SPECIFICATIONS

Model	Signature Series										
Total Power	1065W										
Cable Management	Fully Modular										
PFC	Active PFC (>0.9)										
MTBF (Hours)	>100,000										
AC Input	100 - 240Vac. 6.5-13A 50-60Hz										
Hold-up time (ms)	>16ms										
Fan	165mm Silent Fan										
Fan Size	165mm*25mm										
Typical Fan Noise(dB)	< 25dB										
Full Protection	OCP/OVP/UVLP/SCP/OTP/OPP										
Safety Certifications	cTUVus / TUV / CB / BSMI / CE / FCC / EAC / CCC / RCM/KC										
Dimensions (L x W x D)	210 x 180 x 86mm										
Weight	2.8kg										
Warranty	5 Years										
Connector	24 Pin Motherboard	1									
	8 (4+4) Pin CPU	2									
	8 (6+2) Pin PCI-E	8									
	4 Pin Peripheral	9									
	SATA	10									
	Floppy Power	3									

Model	Max. Output Current									USB	EXTRA POWER	
	+12V1	+12V2	+12V3	+5V	+3.3V	-12V	+5VSB	MAX1	MAX2			MAX3
Signature Series	25A	25A	75A	24A	24A	0.3A	6A	125W	1000W	1650W	3A	5.4A

*MAX1: +3.3V & +5V Total Output / MAX2: +12V Total Output / MAX3: Total Output Power

