AURORA

IN WIN
AURORA
FNA1225P
FAN DC 12V 0.5A LED DC 5V 0.3A
MADE IN CHINA
www.inwin-style.com
IN WIN
AURORA
IN WIN

RGB LED Lighting Effect

With a special IC chip inside, the LED light strip can present an array of colors simultaneously. Users can also use our remote control or our exclusive software to change the lighting or the change frequency. There are endless possibilities since users are now given control of each individualized light.

IN WIN
AURORA
FNA1225P
IN WIN
AURORA
FNA1225P

8
Light Speed level

22
Lighting Mode

7
Fan Speed Level

6
Brightness Level

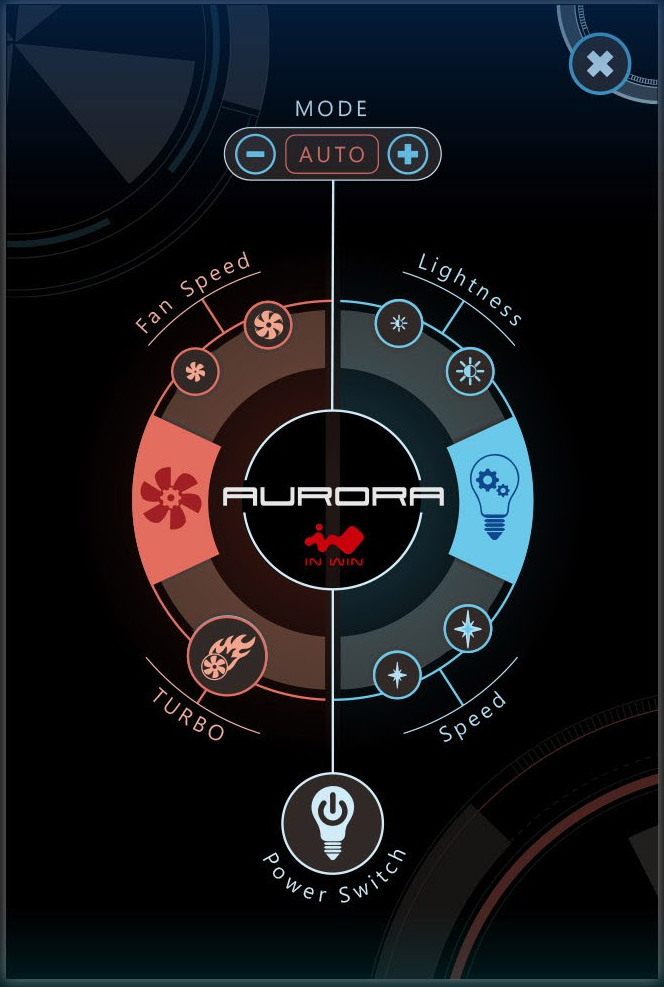

Exclusive Software

Mode Change / Back | AUTO | Mode Change / Next

Mode Display

Revolutions / Slow

Revolutions / Fast

TURBO

Brigtness / Dark

Brigtness / Light

Lighting speed / Slower

Lighting speed / Faster

Light ON/OFF

Exclusive Addressable RGB Cable

By using our exclusive addressable RGB cable to connect to a motherboard's addressable header, the PC's LEDs can be synced by the motherboard. Customizing your PC has never been easier!

IN WIN
AURORA

ASUS AURA SYNC

RGB msi MYSTIC LIGHT SYNC



*The addressable RGB cable can only be used with the motherboard with addressable RGB headers.

*By using the addressable RGB cable, all the Aurora fan function will be controlled by the motherboard.

*The addressable RGB cable can only support addressable RGB header, please DO NOT attempt using the cable on other headers.

Modular Connector Design

The modular connector design allows each fan and LED strip to link with each other, which also provides tidier cable management. By doing this, users will have a totally customizable experience.



Turbo Speed Control

Aurora can speed up the revolutions for better cooling performance.
A useful feature when overclocking and pushing PCs to their limits.
(Speed : 2000 RPM / Air Flow : 57.6 CFM / Air Pressure : 2.77 mm/H2O)

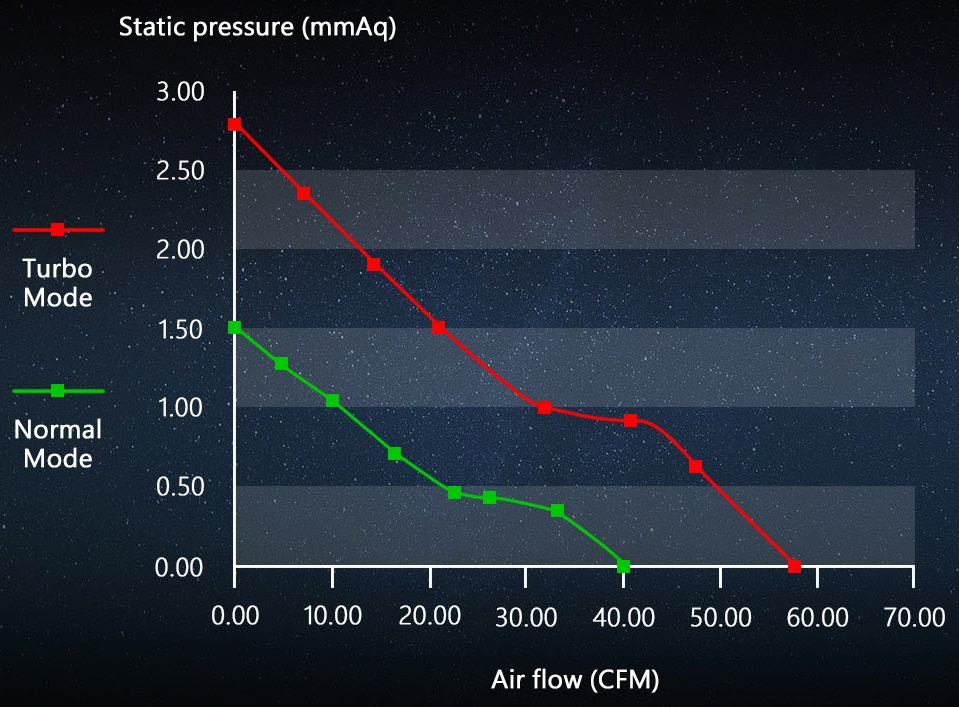

IN WIN
AURORA

Shockproof Rubber Stand

With four shockproof rubber stands on the corners,
Aurora eliminates unwanted vibration for a much quieter experience.

AURORA

Specifications

Product Name	Aurora
Color	Black/Red, Black/White
Part Number	Single Pack AURORAFAN-1PK-BR AURORAFAN-1PK-BW 3 Pack AURORAFAN-3PK-BR AURORAFAN-3PK-BW
Fan Size	120 x 120 x 25 mm
Material	PC
Starting Voltage	5V
Rated Voltage	DC 12V
Rated Power	0.84W
Rated Current	0.5A
ADD RGB Rated Voltage	5V
ADD RGB Rated Power	0.02W
ADD RGB Rated Current	0.06A
Speed Mode (PWM) / Noise Level	PWM 800-1400R.P.M Turbo 2000R.P.M(Max) 800RPM=23.7dBA /NA/NA 1400RPM=30dBA /1.5mmAg /CFM 40.26 2000RPM =39.2dBA /2.77mmAg /CFM 57.64
Air Flow	40.26 CFM
Air Pressure	1.50 mm/H2O
LED	Addressable RGB
Fan Connector	6-Pin Modular
Noise Level	23.7 dB(A)
Bearing Type	Sleeve Bearing
Life expectation	36000 hrs/40℃
Net Weight	1204g (3 Pack)/140g (1 Pack)
Warranty	2 years

IN WIN

Cable Information

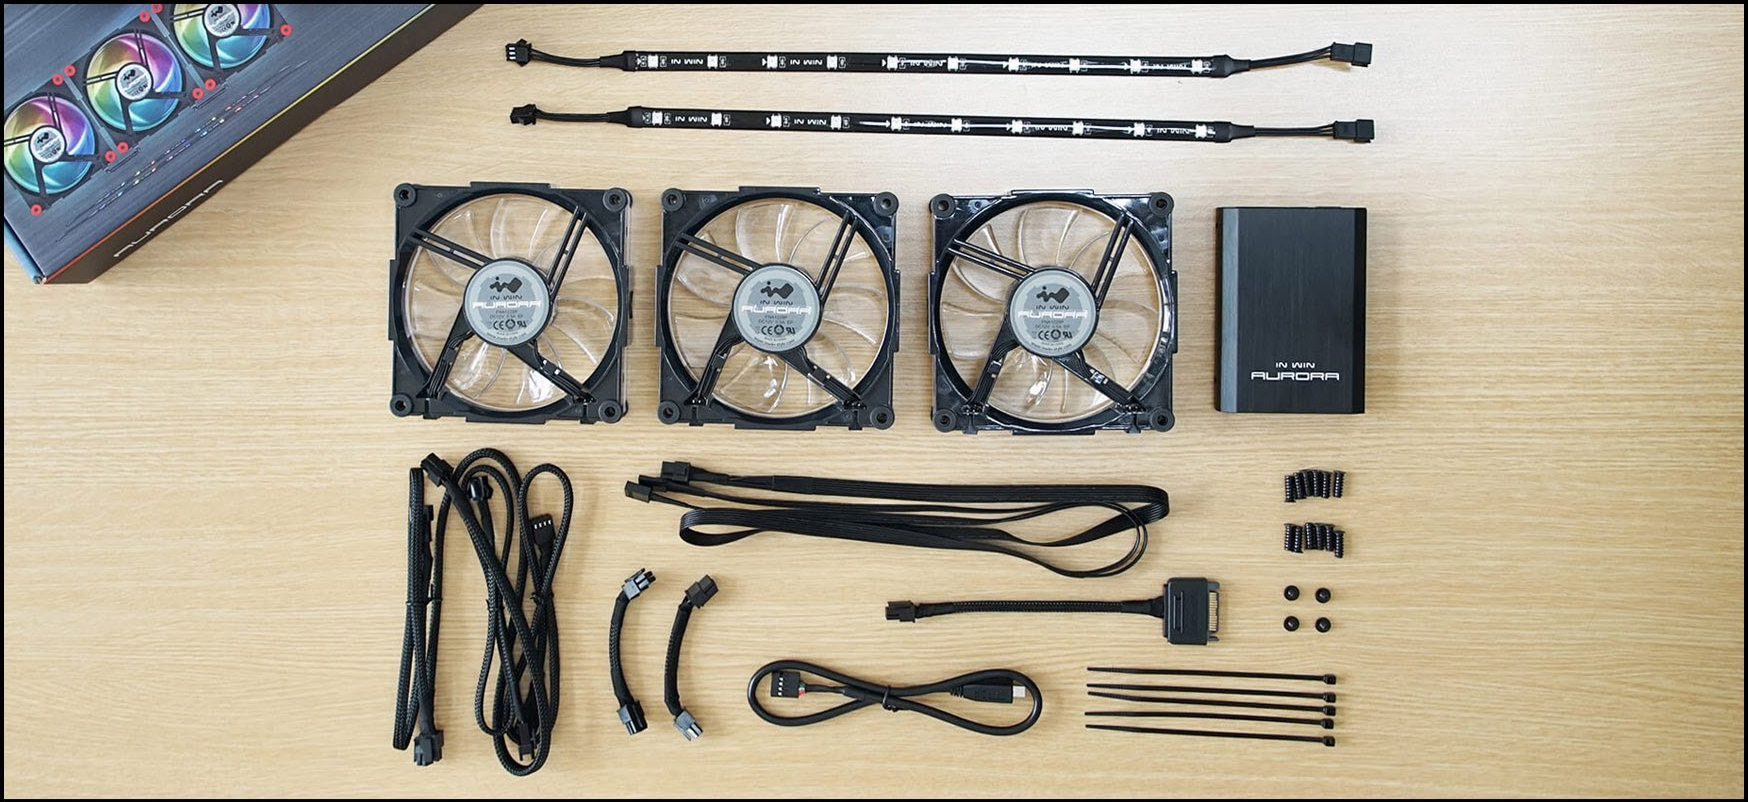

Cable	Amount		Length	Picture
	3-Pack	1-Pack		
Addressable RGB cable	1		800mm	
Power wire	1		200mm	
6-6 pin short length connecting wire (connect fan to fan)	2	1	60mm	
6-6 pin medium length connecting wire (connect fan to fan)	1		500mm	
6-6 pin long length connecting wire (connect fan to fan)	1	1	1000mm	
6-3 pin long connecting wire (connect fan to LED)	1		400mm	
3-3 pin long connecting wire (connect LED to LED)	1		400mm	
4-4 pin connecting wire	1		400mm	
USB-4 pin connecting wire	1		400mm	

Copyright © IN WIN Development Inc. All Rights Reserved.